
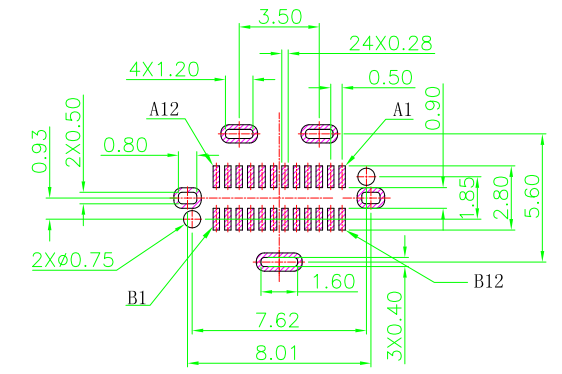

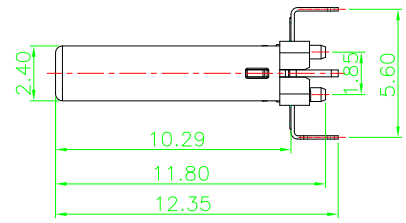
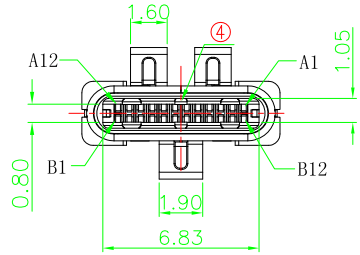
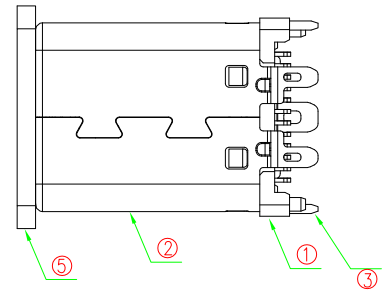


REV	ECN No.	DATE	
A0	NEW	2016.11.05	新版发行


NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

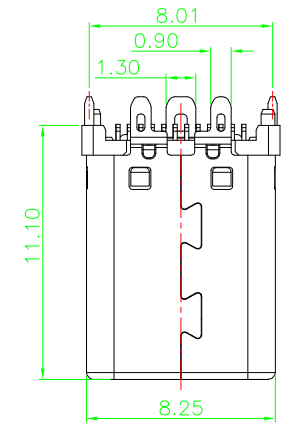

RECOMMENDED PCB LAYOUT(t=0.80±0.05)
COMPONENT SIDE(GENERAL TOLERANCE:±0.05)

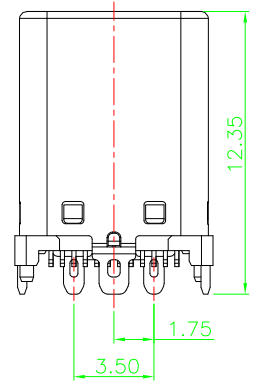

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

TABLE:

USM04-121201-151R	5	COVER	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
	4	SPRING	STAINLESS STEEL	---	2PCS
	3	LATCH	STAINLESS STEEL	TIN/NI Plated	1PCS
	2	SHELL	STAINLESS STEEL	NI Plated	1PCS
	1	TERMINAL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	2PCS
PART NUMBER	NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

MATERIAL NO.:

SEE THE TABLE

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)
0	x.xxxxx ± ---
0	x.xxx ± 0.10
0	x.xx ± 0.25
0	x.x ± 0.30
0	ANGULAR ± --°

东莞市欧盈电子科技有限公司

TITLE: USB C M TYPE 直立式三支脚, 脚距1.75

DOCUMENT NO.: OY-X001-TYAM001-1-012

SHEET NO.: 1 OF 1

DIMENSION STYLE: DESIGN UNITS: SCALE: 5:1

THIRD ANGLE PROJECTION

DRAWN BY: SAM DATE: 2016.11.05

CHECKED BY: TOM DATE: 2016.11.05

APPROVED BY: PETER DATE: 2016.11.05