
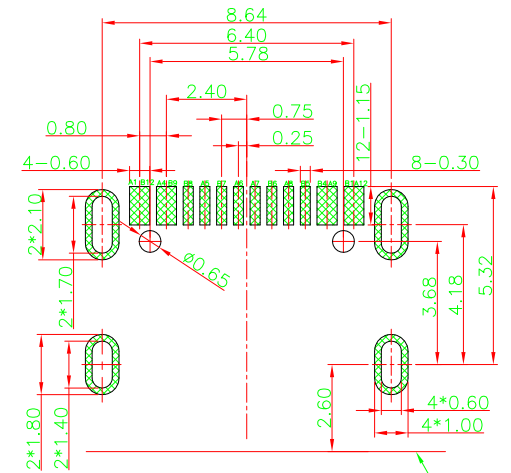
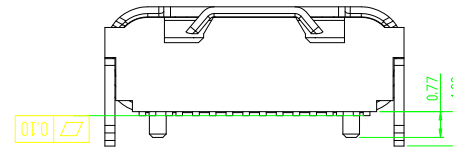

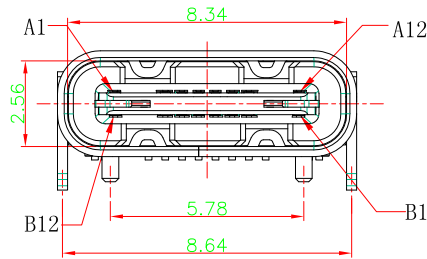



NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

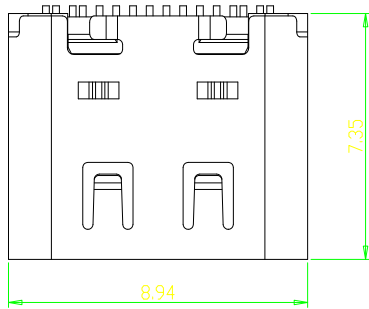

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

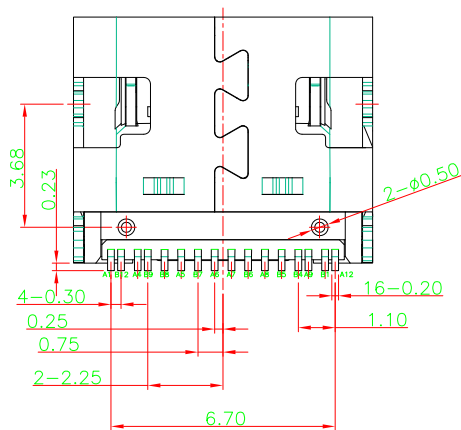

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

东莞市欧盈电子科技有限公司

TOLERANCE: X.X ±0.30, X.* ± 2*, .XX ±0.20, .X* ± 1*, .XXX ±0.10, .XX* ±0.5*

UNITS: mm

MATERILA: [Blank]

FINISH: [Blank]

PART NO. [Blank]

APPD: DMX

CHED: TANG

DRAW: SHI

TITLE: USB C F TYPE单排SMT四脚插板 有柱外壳无凸包CONN.

DRAWG NO. OY-C002-TYAF002-1-012

SCALE: 1:1

SHEET: 1/1

REV: A1

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作