
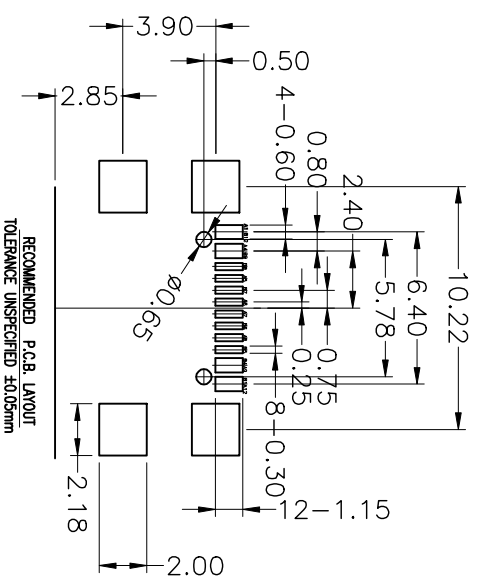

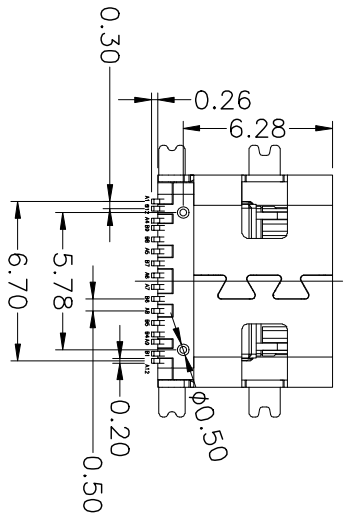
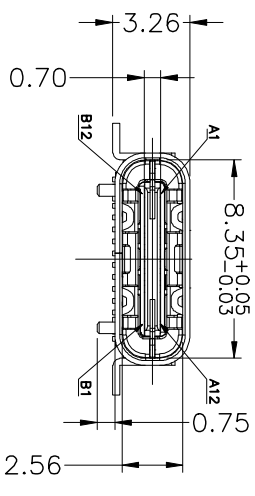


REV	LTR	DESCRIPTION	DATE	APPROVED
A0			20160406	

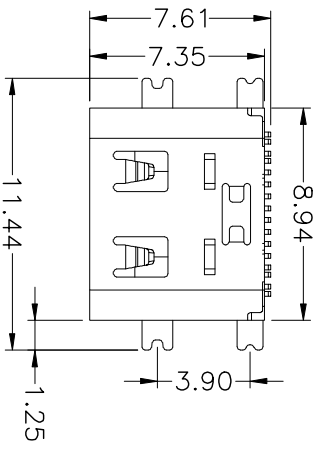

- 备注:**
1. 材质:
 - 1.1 胶芯: LCP+30%G.F UL94V-0
 - 1.2 端子: C18140, T=0.12mm; 铜底, 镀金X μ m
 - 1.3 外壳: 不锈钢, T=0.30mm; 表面镀镍 100 μ m 或亮锡 100 μ m
 2. 主要特性:
 - 2.1 额定电流: 3A
 - 2.2 接触阻抗: 40m Ω MAX
 - 2.3 绝缘阻抗: 100M Ω MIN 250V DC
 - 2.4 耐压测试: 100V AC
 - 2.5 沾锡性: 温度250I:5 $^{\circ}$ C, 时间5I:1A:0.5s
 - 2.6 整体插入力: 2.0kgf MAX
整体拔出力: 0.6kgf MIN
 - 2.7 使用寿命: 5000次
 - 2.8 工作温度: -30 $^{\circ}$ C~+80 $^{\circ}$ C

TITLE:

TOLERANCES		东莞市欧盈电子科技有限公司	
.X	±0.30	OYELBC TECHNOLOGY CO., LTD	
.II	±0.20	USB Type-C/F 短体7.6 SMT背挂脚 16PIN母座	
.III	±0.10	PART NO.: OY-S001-TYAF007-1-012	
ANGLES	±1.00°	DRAWING NO.:	
APPL.:		REV.:	SIZE:
CHECK:		A/O	M4
DRAWN:		UNIT:	M M
		SCALE:	1 : 1
		SHEET:	1 / 1